

TWINWALL TAPERED FIRE BOX 25mm WALLS

Standard (*1 & *2) : Supplied with a rigid flue adapter, with fixing tabs, with twinwall base, no flange & no legs

Options in any combination:


With Flange (*4)

With 140mm Adjustable Legs


(Legs have 90mm of adjustment) (*3 & *4)




Plan Elevation

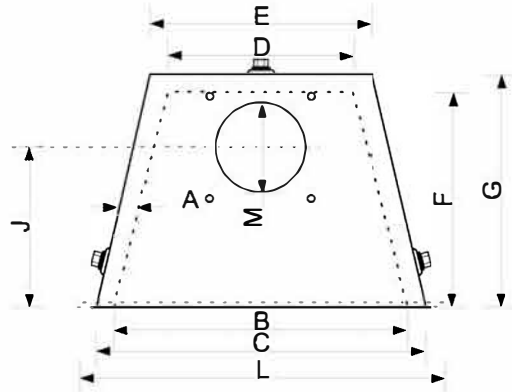

Front Elevation

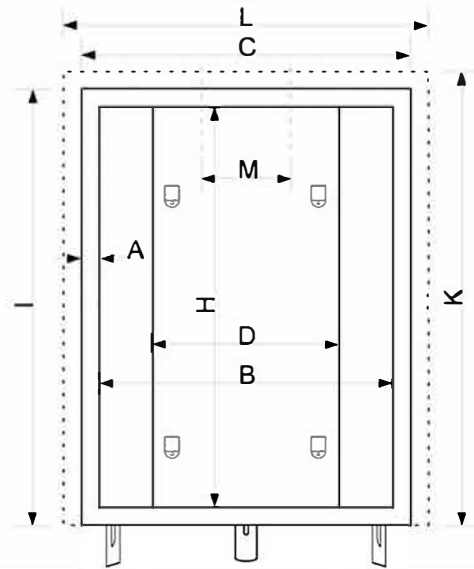

Side Elevation

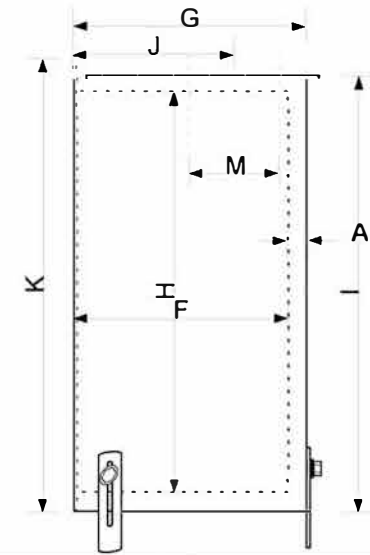

<p>Flue Adapter Selkirk 'IL'</p>	<p>Flue Adapter Rightvent 'B-Vent'</p>	<p>Flue Adapter Selkirk 'IL'</p>	<p>Flue Adapter Rightvent 'B-Vent'</p>	<p>Flue Adapter Selkirk 'IL'</p>	<p>Flue Adapter Rightvent 'B-Vent'</p>
----------------------------------	--	----------------------------------	--	----------------------------------	--

A - Wall Thickness	25mm	G - Depth Outside	330mm	M - Spigot Diameter	125mm	<p>Drawing Copyright: Fluetechn Ltd Unit 19 Drakes Industrial Estate Shay Lane, Halifax West Yorkshire HX3 6RL Tel: 01422 351322 www.fluetechn.co.uk</p>	<p>Description: Twinwall Tapered Fire Box to suit deep inset fires. Designed to be installed prior to the fireplace and when either a Selkirk 'IL' or Rightvent 'B-Vent' 125mm (5") rigid flue system is being used. Please note: only one collar of your choice is supplied per box.</p> <p>Suitable for gas installations where a twinwall box is required by the fire manufacturer</p> <p>Materials: 22SWG Galvanised steel outer body with aluminium inner body</p>	Drawing:	RB_25_T_TW8
B - Front Inside Width	405mm	H - Height Inside	560mm	N - Adapter Base Depth	190mm			Revision:	1
C - Front Outside Width	455mm	I - Height Outside	610mm	O - Adapter Base Width	185mm			Drawing Date:	11/04/2011
D - Rear Inside Width	255mm	J - Depth to Spigot Centre	225mm	P - Flue Diameter	125mm			Drawn:	PS
E - Rear Outside Width	305mm	K - Face Height with Flange	635mm	Q - Adapter Height - 'IL'	140mm				
F - Depth Inside	305mm	L - Face Width with Flange	505mm	R - Adapter Height - 'B-Vent'	85mm				